
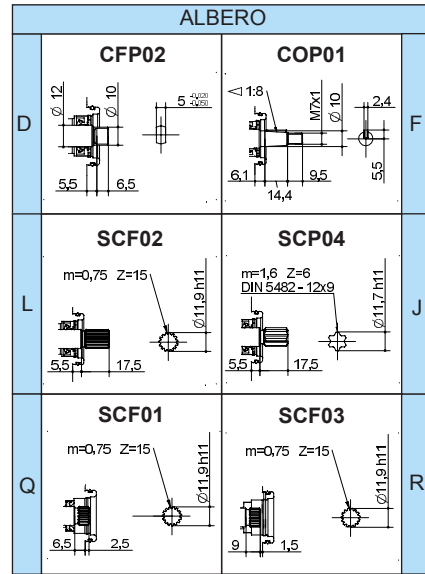
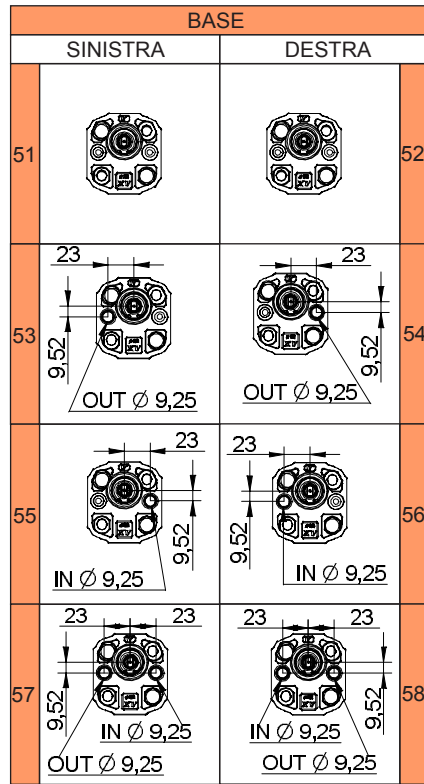


# POMPA MULTIPLA XV-1



## BASE $\varnothing$ 32 Sagomata - TIPO "HY"

**XV-1**

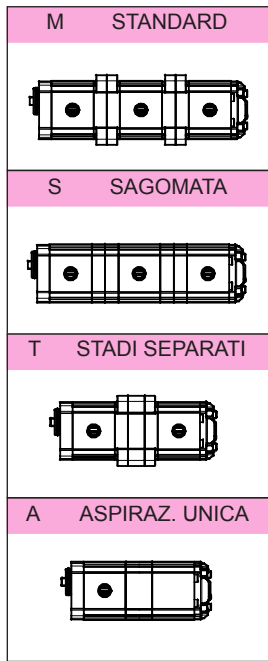

9 M 3 52 D G A 25 25 ..... 25

NUMERO DI ELEMENTI

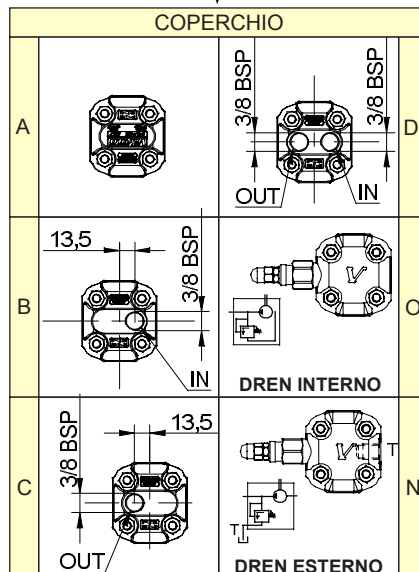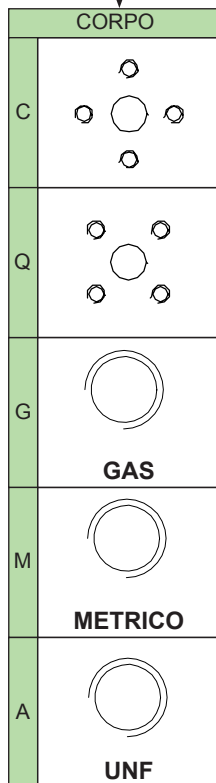








| CILINDRATE |           |
|------------|-----------|
| 16         | XV-1P/0.9 |
| 17         | XV-1P/1.2 |
| 18         | XV-1P/1.7 |
| 20         | XV-1P/2.2 |
| 21         | XV-1P/2.6 |
| 23         | XV-1P/3.2 |
| 25         | XV-1P/3.8 |
| 27         | XV-1P/4.3 |
| 29         | XV-1P/4.9 |
| 31         | XV-1P/5.9 |
| 32         | XV-1P/6.5 |
| 34         | XV-1P/7.8 |
| 36         | XV-1P/9.8 |

| CILINDRATE |            |
|------------|------------|
| 01         | XV-0P/0.17 |
| 02         | XV-0P/0.25 |
| 04         | XV-0P/0.45 |
| 05         | XV-0P/0.57 |
| 06         | XV-0P/0.76 |
| 07         | XV-0P/0.98 |
| 09         | XV-0P/1.27 |
| 11         | XV-0P/1.52 |
| 13         | XV-0P/2.30 |


# POMPA MULTIPLA XV-1

BASE  $\varnothing$  32 Sagomata - TIPO "HY"


**XV-1**

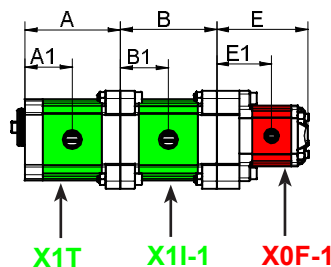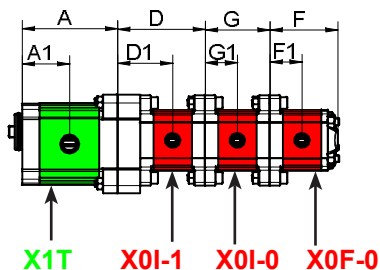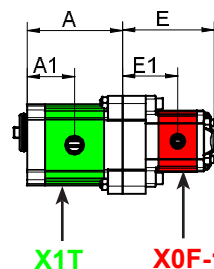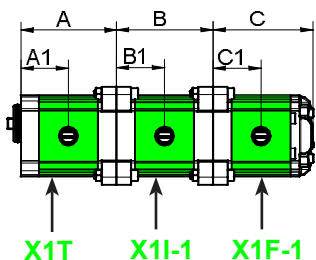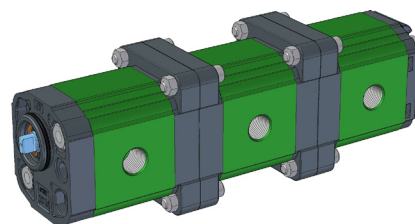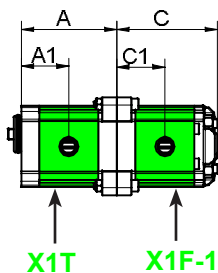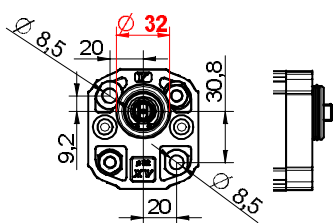

## STADI SEPARATI



## ASPIRAZIONE UNICA



\* = ELEMENTI SPECIALI, per l'ordine del singolo elemento, contattare l'ufficio tecnico

| TIPO       | Cilindrata<br>Cm3/giro | A<br>mm | A1<br>mm | B<br>mm | B1<br>mm | C<br>mm | C1<br>mm | P1<br>bar | P3<br>bar | Regime Min<br>giri/min | Regime Max<br>giri/min |
|------------|------------------------|---------|----------|---------|----------|---------|----------|-----------|-----------|------------------------|------------------------|
| XV-1 / 0,9 | 0,91                   | 73,5    | 36,3     | 74,5    | 37,3     | 78      | 37,3     | 240       | 280       | 700                    | 6000                   |
| XV-1 / 1,2 | 1,17                   | 74,5    | 36,8     | 75,5    | 37,8     | 79      | 37,8     | 250       | 290       | 700                    | 6000                   |
| XV-1 / 1,7 | 1,56                   | 76      | 37,5     | 77      | 38,5     | 80,5    | 38,5     | 250       | 290       | 700                    | 6000                   |
| XV-1 / 2,2 | 2,08                   | 78      | 38,5     | 79      | 39,5     | 82,5    | 39,5     | 250       | 290       | 700                    | 6000                   |
| XV-1 / 2,6 | 2,60                   | 80      | 39,5     | 81      | 40,5     | 84,5    | 40,5     | 250       | 300       | 700                    | 6000                   |
| XV-1 / 3,2 | 3,12                   | 82      | 40,5     | 83      | 41,5     | 86      | 41,5     | 250       | 300       | 700                    | 6000                   |
| XV-1 / 3,8 | 3,64                   | 84      | 41,5     | 85      | 42,5     | 88,5    | 42,5     | 250       | 300       | 700                    | 6000                   |
| XV-1 / 4,3 | 4,26                   | 86      | 42,5     | 87      | 43,5     | 90,5    | 43,5     | 250       | 300       | 700                    | 6000                   |
| XV-1 / 4,9 | 4,94                   | 89      | 44       | 90      | 45       | 93,5    | 45       | 250       | 300       | 700                    | 6000                   |
| XV-1 / 5,9 | 5,85                   | 92,5    | 45,8     | 93,5    | 46,8     | 97      | 46,8     | 250       | 300       | 700                    | 5000                   |
| XV-1 / 6,5 | 6,50                   | 95      | 47       | 96      | 48       | 99,5    | 48       | 250       | 300       | 700                    | 5000                   |
| XV-1 / 7,8 | 7,54                   | 99      | 49       | 100     | 50       | 103,5   | 50       | 220       | 260       | 700                    | 5000                   |
| XV-1 / 9,8 | 9,88                   | 108     | 53,5     | 109     | 54,5     | 112,5   | 54,5     | 190       | 230       | 700                    | 4000                   |

| TIPO        | Cilindrata<br>Cm3/giro | D<br>mm | D1<br>mm | E<br>mm | E1<br>mm | F<br>mm | F1<br>mm | G<br>mm | G1<br>mm | P1<br>bar | P3<br>bar | Regime Min<br>giri/min | Regime Max<br>giri/min |
|-------------|------------------------|---------|----------|---------|----------|---------|----------|---------|----------|-----------|-----------|------------------------|------------------------|
| XV-0 / 0,17 | 0,16                   | 72,3    | 46,2     | 75,8    | 46,2     | 55,8    | 26,2     | 52,3    | 26,2     | 220       | 260       | 700                    | 9000                   |
| XV-0 / 0,25 | 0,24                   | 72,9    | 46,5     | 76,4    | 46,5     | 56,4    | 26,5     | 52,9    | 26,5     | 220       | 260       | 700                    | 9000                   |
| XV-0 / 0,45 | 0,45                   | 74,5    | 47,3     | 78      | 47,3     | 58      | 27,3     | 54,5    | 27,3     | 220       | 280       | 700                    | 9000                   |
| XV-0 / 0,57 | 0,56                   | 75,5    | 47,8     | 79      | 47,8     | 59      | 27,8     | 55,5    | 27,8     | 220       | 280       | 700                    | 9000                   |
| XV-0 / 0,76 | 0,75                   | 77      | 48,5     | 80,5    | 48,5     | 60,5    | 28,5     | 57      | 28,5     | 220       | 280       | 700                    | 9000                   |
| XV-0 / 0,98 | 0,92                   | 78,5    | 49,3     | 82      | 49,3     | 62      | 29,3     | 58,5    | 29,3     | 220       | 280       | 700                    | 6000                   |
| XV-0 / 1,27 | 1,26                   | 81      | 50,5     | 84,5    | 50,5     | 64,5    | 30,5     | 61      | 30,5     | 220       | 280       | 700                    | 6000                   |
| XV-0 / 1,52 | 1,48                   | 83      | 51,5     | 86,5    | 51,5     | 66,5    | 31,5     | 63      | 31,5     | 220       | 280       | 700                    | 6000                   |
| XV-0 / 2,30 | 2,28                   | 89      | 54,5     | 92,5    | 54,5     | 72,5    | 34,5     | 69      | 34,5     | 220       | 210       | 700                    | 5000                   |